

1" CONDUIT FOR GROUNDING

1" CHAMFER

BOLT CIRCLE

9" DIAMETER CONDUIT AREA

ANCHOR BOLTS

21"

SECTION A-A

3" ANCHOR BOLT PROJECTION


ANCHOR BOLTS (4) REQUIRED

1" CONDUIT

1/2" EXPANSION JOINT FILLER WITH SEALER

2"-4" PROJECTION FOR CONDUIT

CONCRETE SIDEWALK OR PAVER

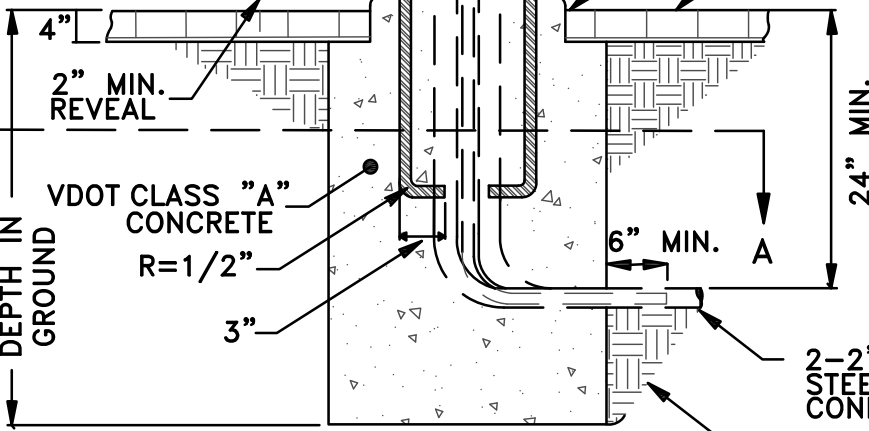

NOTES:

1. FOUNDATION TOP SHALL BE FINISHED AND LEVEL.
2. ANCHOR BOLTS SHALL BE 3/4"X18".
3. BOLT PATTERN SHALL BE PARALLEL TO THE CURB.
4. ALL CONDUIT RADII ARE 90 (R) 24" SWEEPS.
5. THIS DETAIL DOES NOT APPLY TO CARLYLE STREETLIGHT POLES.

PEDESTAL POLE FOUNDATION

REVISION & DATE



ARLINGTON COUNTY, VIRGINIA
DEPARTMENT OF ENVIRONMENTAL SERVICES

DRAWING NO.
66-04
FORMERLY TS4-3